



Eur päisches
Patentamt

European
Patent Office

Office eur péen
des brevets

JC682 U.S. PRO

09/627741



Bescheinigung

Certificate

Attestation

2

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00480013.2

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

07/04/00

This Page Blank (uspto)



Eur päisches
Patentamt

Eur pean
Patent Office

Office eur péen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°:

00480013.2

Anmeldetag:
Date of filing:
Date de dépôt:

06/01/00

Anmelder:
Applicant(s):
Demandeur(s):
International Business Machines Corporation
Armonk, N.Y. 10504
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Server assisted system for accessing web pages from a personal data assistant

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

This Page Blank (uspto)

**SERVER ASSISTED SYSTEM FOR ACCESSING WEB PAGES FROM A
PERSONAL DATA ASSISTANT**

Technical field

The present invention relates to data communication systems wherein a Personal Data Assistant (PDA) enables the user to access the Internet network capabilities and relates in particular to a server system for accessing web pages from a PDA.

Background

A Personal Digital Assistant which is a simple and small device fitting in the pocket, combines the portability of the traditional day planner with the connectivity of a Personal Information Manager (PIM) providing a day planner in a computer. The PDA does a lot more than keeping a schedule up-to-date. It can share data, write notes, schedule meetings, track expenses, or compose e-mail, and play all sorts of games. It is possible to sync it up to a desktop computer so it is not necessary to duplicate efforts.

Now, for getting more information, it is necessary to have access to the Internet network and to use a web browser. But a high definition screen is required to use it properly and needs also a large amount of data transfer. It is not possible today to use this standard web browsing method from a PDA even if some improvements have been made. However, even if the PDA cannot afford the full quality of a computer, the amount of information being transmitted could be reduced because what is needed is clean, pure information delivered instantly.

It is at present possible to use the handheld-device markup language (HDML) which offers an alternative to the hypertext markup language (HTML) used today on Web servers / browsers. HDML offers the power of pure information access within the context of the extreme interface limitations of the devices it is designed for. A PDA with integrated or external connection to a cell phone has an IP address and a browser built in. When the PDA is switched on, a menu comes up displaying the feature set (information services, address book, email, etc.) Jumping into information services, a list of the usual categories: news, weather, and sports can be accessed. When an information provider is selected, the phone sends a request over the cellular packet network, which arrives at a sort of proxy server at the wireless service. It passes the request off to the contents provider as a simple HTTP request. The contents provider sends back the appropriate HDML file, and it shows up on the phone's tiny screen. The limitation is that the provider should have implemented this feature, which anyway limits the number of web locations that can be looked at.

Instead of web surfing, the PDA can use another alternative called web clipping. When web clipping, the extraneous parts of the browsing process are extracted in an effort to minimize power usage and storage requirements. This technique needs also partnering with an array of contents providers, which will design special query pages that will ship with the PDA. These

pages will be smaller (clipped) versions of pages which are available on regular web sites and they will enable the device to send and receive the smallest possible amount of data.

It must be noted that there is now a custom portal which is defined by the user, and which is specifically adjusted to the user business inasmuch as it can be tailored to meet the user specific requirements such as data base access, directories, business research engines, tools, stocks, wheather and other resources. Unfortunately, such a facility can be defined only with a computer.

Summary of the invention

Accordingly, the main object of the invention is to provide a system enabling a PDA user to get on the PDA any up-to-date information from the web that has been selected directly by the user.

Another object of the invention is to provide a system for getting data from the web in order to show them on a PDA and more particularly for taking defined data areas from web pages assigned to define screen positions on the PDA.

Brief description of the drawings

The above and other objects, features and advantages of the invention will be better understood by reading the following more particular description of the invention in conjunction with the accompanying drawings wherein :

- Fig. 1 is a schematic view of a system including a PDA and a portal server connected to the Internet network according to the principles of the invention.

- Fig. 2 is a block-diagram representing the main components of the PDA, the portal server and the user workstation, and the operating links therebetween.
- Fig. 3 is a schematic view of the fields to be displayed on the PDA as they are scheduled in the portal server.
- Fig. 4A and 4B are respectively two consecutive screens which can be displayed on the screen of the PDA using the fields to be displayed as defined in Fig. 2.
- Fig. 5 is a flow chart of the steps which can be used in the portal server to select web page fields.
- Fig. 6 is a flow chart of the steps which can be used in the PDA to display web page fields or modify them.

Detailed description of the invention

As illustrated in Fig. 1, a wireless PDA 10 which can have an integrated wireless interface or a link to a wireless phone has a wireless connection to a wireless gateway 12. Intermediate equipment such as base transceiver (BTS) station providing the RF interface, base station controller (BSC) or Mobile switching center (MSC) are not shown as they just act as a transmission media between the wireless PDA 10 and the interface Gateway 12.

The wireless gateway 12 is used to enter a WAN such as Internet network 14. It may be linked to all servers of the network such as servers 16, 18 by the intermediary of a portal PDA server 20. The custom portal PAD server 20 may be contacted from any workstation 22 having access to the web with, if necessary, some secure access such as logon and password or thanks to a certificate included in the workstation. It is also a method of the invention to take coordinates from a GPS device linked or integrated into the PDA to request a MAP for the area where the user is or routing information. The coordinates may be also given in some areas by the wireless phone carrier which can correlate level of signals from different BTS stations and give an approximate position of the calling device.

Fig. 2 is a block diagram representing the three main components of the system according to the invention that is PDA 10, portal server 20, user workstation (generally a PC) 22, and the different links and interactions between them. The web servers on which the information is taken are not represented but are accessed for creating portal pages by the following software components : Both PC web browser 24 and PDA web browser 26, the former being a standard browser and the latter being a simplified browser showing first text of web pages as the view capabilities are limited on a PDA and showing one by one the possible images of the web page just in order to select the items to add to the portal browser but the main way to build portal pages remains using the PC web browser.

When web page is accessed using a web browser, part of the visible web page may be copied into a portal page using the PC portal configurator 28 or PDA portal configurator 30 depending on which device the user works. The portal configurator 28 or 30 has the function of configuring the selected web page fields for using them in portal server 20 and then gives the configured data to a portal database builder 32 which will ask for user definitions such as update method (real time or background task update), position... and put all the information for the user into portal database 34.

The handling means of the portal server 20 comprises a portal back server 36 and a portal real time (RT) server 38. The function of portal back server 36 is to update regularly the view field value of data base 34 in order to provide a faster download when a PDA portal browser 40 (in PDA 10) or a PC portal browser 42 (in workstation 22) requests a portal page. Email, meteo information, news do not need really Real time view and may be pre-stored by regular update on the portal database 34. In order to achieve that, portal back server 36 acts as a background task which analyzes all elements within database 34 and updates fields being set for regular refresh

with a period defined so as to maintain an updated database. Other information such as stocks value need real time update and are requested to the source web server by the portal RT server 38 when a portal browser activates the request. When the portal RT server 38 receives a request, it first look at portal database 34 and takes directly view fields updated by portal back server 36 and starts the download of these fields to the requesting browser. In parallel real-time defined fields start contact of related URLs (web pages) to get the corresponding fields which are then downloaded to the requesting browser. This mechanism speeds up the downloading and appearance of data on the browser screen as this method differs from the classical web page browsing that put data in HTML order.

In the preferred embodiment, the portal server 20 is defined by the user accessing it through workstation 22 to build web pages, such a page being illustrated in Fig. 3. This page may be built using current portal design thanks to HTML language but may also be built using cut and paste from other web pages. For example , a stock web server page may be activated each time the user requests its portal page and a portion of the screen on the stock web server page will be copied onto the stock area 44 of the user web portal view. The cut and paste method can be bitmap, text or html depending on the type of data it includes but this is managed directly by the cut and paste function. Using this method , the user can built its own portal page that will also include as an example a search area 46 on a search engine , some advertising 48 that the user want to see on the web portal, the day news 50 , its e-mail 52 and weather forecast 24. The remaining information on the screen is text or graphic that the user never wants to see on its PDA.

Now, Fig 4A is a schematic illustration of the information displayed on PDA 10. All the fields that were defined on the user web portal view are available except the advertising 48 which is not necessary on this screen but which can be called

using its reference number on another screen. Assuming that the PDA has a separate input and output area, the search area 46 from web portal view is moved on the input field which creates a search area 56. The other areas are put in output field including Stocks 58, E-mail 60, Weather forecast 62 and news 64. Each of these fields may be selected to be alone on the screen either by selecting it by the pen of the PDA by giving its identification on the input field depending on the PDA capabilities. It allows to get more details or to select a special sub-field in this area. This is the case when selecting news 64, which will open the screen illustrated in Fig. 4B with only the news 64 in full screen mode. The input area in that case which contains the search input field 56 can perform a search on the news. The process explaining how further information is shown is detailed in the following description. The behaviour of the PDA can be simulated on the portal server using a normal web browser. A web page will show the PDA screen and buttons and by using the mouse instead of the pen, it can be verified that the fields definition made are working fine.

Fig. 5 is a flow-chart representing the steps of selecting information to be added on a portal server page using a PC web browser 24 in workstation 22. The first thing to do when using a PC web browser is to select as URL (Uniform Resource Locator) address of the page or sub-page. Uniform Resource Locators are short strings that identify resources in the web such as documents, images, downloadable files, services, electronic mailboxes, and other resources. The user will be able to see this page on its screen (step 66). The user can then select either the PC browser mode or the PDA browser mode (step 68). When the PC browser mode is selected, it is then possible to go to other URL locations (step 70) in the Internet network to extract information to be put on both PDA and portal. When the user is on this URL, he can select any field (step 72) on the screen using the mouse. Then, this field position is correlated with the HTML file of the current page to identify the type of

information that is defined in this area (step 74). It can be simple text, bitmap, graphic file, URL link, or any other media. This field is converted in a database field element by a FIELD_STORE software resident in the portal server. This field will have PDA representation that may be shown on the PDA and which can be transmitted using a minimum of bandwidth such as compressed bitmap or simple text. If there is more than one possible conversion, the program will ask the user about his choice. The user will then be able to put this field onto one of the portal pages.

Note that are stored in database 34 of the portal server the following items: the URL location and page, the field position, the last HTML as a reference for identifying modification onto this HTML page, the positioning of this field in PC mode and PDA mode including the size, the conversion mode, refresh mode and parameters, the field value itself if not included within the HTML such as a figure, the actions allowed on this field in PDA mode such as open separately, input fields, scrolling, numbering... For each field, templates are defined or the user can copy an existing field configuration that match its requirement and change only the URL location, field position and size.

The database 34 is either refreshed based on HTML information included in the source page or refresh period defined by the user or when a browser is activated from the PDA onto this page. This refresh mode may be defined when the PDA is connected only or permanently. It is also possible to store the current field value if the refresh is only performed at user request. This speeds up the page presentation on the PDA as no contact to source web pages is required when this field is sent to the PDA. It also avoids to send an update when in fact there is no real change since the last update and will save bandwidth. The portal server acts as a web cache and converter dedicated for each user. All specific fields of a portal page

are then refreshed as if a connection is established on each of the related web pages upon a user request or a defined refresh action within the database.

Then, the user can continue with another field on the same web page or go onto another page of the same URL or on another URL location through steps 66 to 74 or select to work in PDA mode back (step 68). In that case, it is possible to select (step 76) either the view mode where (step 78), the positioning of not yet positioned fields may be done or existing fields position modified or may jump to the test environment and enter into emulation mode (step 80) where a representation of the PDA will be activated on which any of the web operations can be emulated in order to verify and optimize the web portal browsing. This can be done field by field or a set of fields may be predefined in PC mode and then positioned in PDA mode. The positioning (step 78) includes detailed definition for this field such as additional input field meanings, scrolling, item numbering, full screen mode, return action.

Fig. 6 is a flow-chart representing the steps of viewing information from the portal server page or adding information field to the portal from the PDA. There are some preliminary actions that should be done prior to use the portal server from the PDA. A connection to the Internet network should be performed such as a wireless connection using available carriers. A connection should be then performed by defining the portal server as the current URL. The portal server identifies the user either by a logon and password, or imbedded PDA certificate or using a predefined id unique to this user.

After that, the user may view its homepage (step 82) and is then able either to look at predefined pages and fields which were defined thanks to the PC browser mode as described in Fig. 5 and corresponds to the "no" answer to new field question (step 84) or can link itself to other URL locations (step 86)

to select additional fields from a text browsing mode (step 88). In this case, the user can select and copy words or lines on its text browsing mode. This information is paste to a search field onto the portal server which will perform the actions describes at steps 72 and 74 in Fig. 5. At the end of the conversion, the portal server appends this field to the last defined user page or onto a new page if there is not enough room for this field on the last one. The PDA user can use this field in this mode and eventually can perform a copy and paste onto an existing PDA page. If a new page is created, on top of this new field, the user can copy and then paste any existing fields found on the other user pages.

Input fields may be used to provide manually or automatically positioning information such as co-ordinates as an input (steps 86 and 88) which will be handled by the portal server. This one will generate a request on predefined MAP or routing servers on the web in order to get a MAP or routing field which will be converted to a visible entity on the PDA (step 90) as the portal knows how to convert these fields. Tests can be made on any map using PC browser mode in order to predefine the characteristics of such MAP request.

When the use mode is selected by a "no" answer at step 84, the user can select a detailed view of a field within the current portal pager (step 92) or select one of the defined portal pages (step 94). In this case, the user selects a detailed view of a field, this enabling a new view (step 96) with only this field and a possible input field for example to perform search on the field text or associated URL. What is accessed is never directly the original web page but its copy, full or partial this is made on a portal page. A request for the view of a portal page activates a PDA_VIEW software which uses the definition of each field of the portal page required, stored in the database, or part of this page to build dynamically the PDA representation. The PDA page is therefore first updated as

defined by each field definition in the database before being transmitted to the PDA. Further field updates may be requested from the PDA by the user, for example for some permanently updated fields such as stocks value. Longer refresh time may be defined for e-mail fields. If a change is performed by the PDA, it is automatically updated on the portal server database as it is the PDA_VIEW software located in this server that will contact each web server to get the necessary updates and never the PDA directly.

It is possible at any time to return (step 98) from this detailed view to the previous portal page or to another portal page thanks to a loop to step 82. Otherwise, the process links to the home page of this user and ask for disconnection. A timer will activate the disconnection after a predefined inactive time.

This Page Blank (uspto)

CLAIMS

1. Server assisted system for accessing web page fields comprising a wireless Personal Data Assistant (PDA) (10) communicating with the Internet network (14) by the intermediary of a wireless Internet gateway (12) and a portal server (20) capable of accessing the resources of the Internet network such as servers (16, 18) ; said system being characterized in that :
 - said portal server comprise a data base (34) containing at least identifying information enabling fields of web pages selected by the user to be retrieved, and portal handling means (36, 38) for accessing said selected web page fields, and
 - said PDA comprises portal browsing means (26) for browsing said selected web page fields and retrieving at least one of them, and display means for displaying said retrieved web page field.
2. System according to claim 1, wherein said portal handling means comprise a portal real time server (38) for accessing to the resources of said Internet network (14) and retrieving from said servers (16, 18) web page fields requested by said portal browsing means (26).
3. System according to claim 2, wherein said portal handling means also comprise a portal back server (36) for periodically updating defined web page fields stored in said data base (34).
4. System according to claim 3, wherein said portal real time server (38) looks at first said data base (34) before accessing to the resources of said Internet network (14) to know whether said web page fields requested by said portal

browsing means (26) are within said defined web page fields being periodically updated.

5. System according to any one of claims 1 to 4, wherein said workstation (22) includes a PC web browser (24) for accessing the resources (16, 18) of said Internet network (14) and for browsing web pages selected by the user, and a portal configurator for configuring selected web page fields before transferring them to said portal server (20), and wherein said portal server includes a data base builder (32) for storing at least identifying information relating to said web page fields into said data base (34).
6. System according to any one of claims 1 to 4, wherein said PDA (10) includes a PDA web browser (26) for accessing the resources (16, 18) of said Internet network (14) and for browsing web pages selected by the user and a PDA configurator (30) for configuring selected web page fields before transferring them to said portal server (20), and wherein said portal server includes a data base builder (32) for storing at least the identifying information relating to said web page fields into said data base (34).
7. System according to claim 5 or 6, wherein said PC web browser (24) or said PDA web browser (26) further comprises means for accessing to the Uniform Resource Locator (URL) address of the web page to be selected, means for selecting one or several fields in said URL web page and means for converting said selected URL web page field(s) to be stored in said data base (34).
8. System according to claim 5 wherein said user workstation (22) includes means for positioning the web page fields on a page viewed on the screen of said PDA (10).

9. System according to claim 5 or 8, wherein said user workstation (22) includes means for emulating the operation of said PDA (10).
10. System according to claim 6, wherein said portal browsing means (26) in said PDA (10) include input means (56) for selecting one or several web page fields stored in said data base (34) of said portal server (20) in order to display said field(s) by said PDA display means.
11. System according to claim 10, wherein said input means (56) include means for modifying said field(s) being displayed by said PDA display means such as viewing only one field among the fields previously displayed.
12. System according to claim 10 or 11, wherein said input means (56) include a pen for selecting said field(s) displayed by said PDA display means.

This Page Blank (uspto)

SERVER ASSISTED SYSTEM FOR ACCESSING WEB PAGES FROM A
PERSONAL DATA ASSISTANT

Abstract
Abstract

Server assisted system for accessing web page fields comprising a wireless Personal Data Assistant (PDA) (10) communicating with the Internet network (14) by the intermediary of a wireless Internet gateway (12) and a portal server (20) capable of accessing the resources of the Internet network such as servers (16,18). The portal server comprises a data base containing at least identifying information enabling fields of web pages selected by the user to be retrieved, and portal handling means for accessing the selected web page fields, and the PDA comprises portal browsing means for browsing the selected web page fields and retrieving at least one of them and display means for displaying the retrieved web page field.

FIG. 1

This Page Blank (usptc)

FR 9 99 108
Benayoun et al
1/6

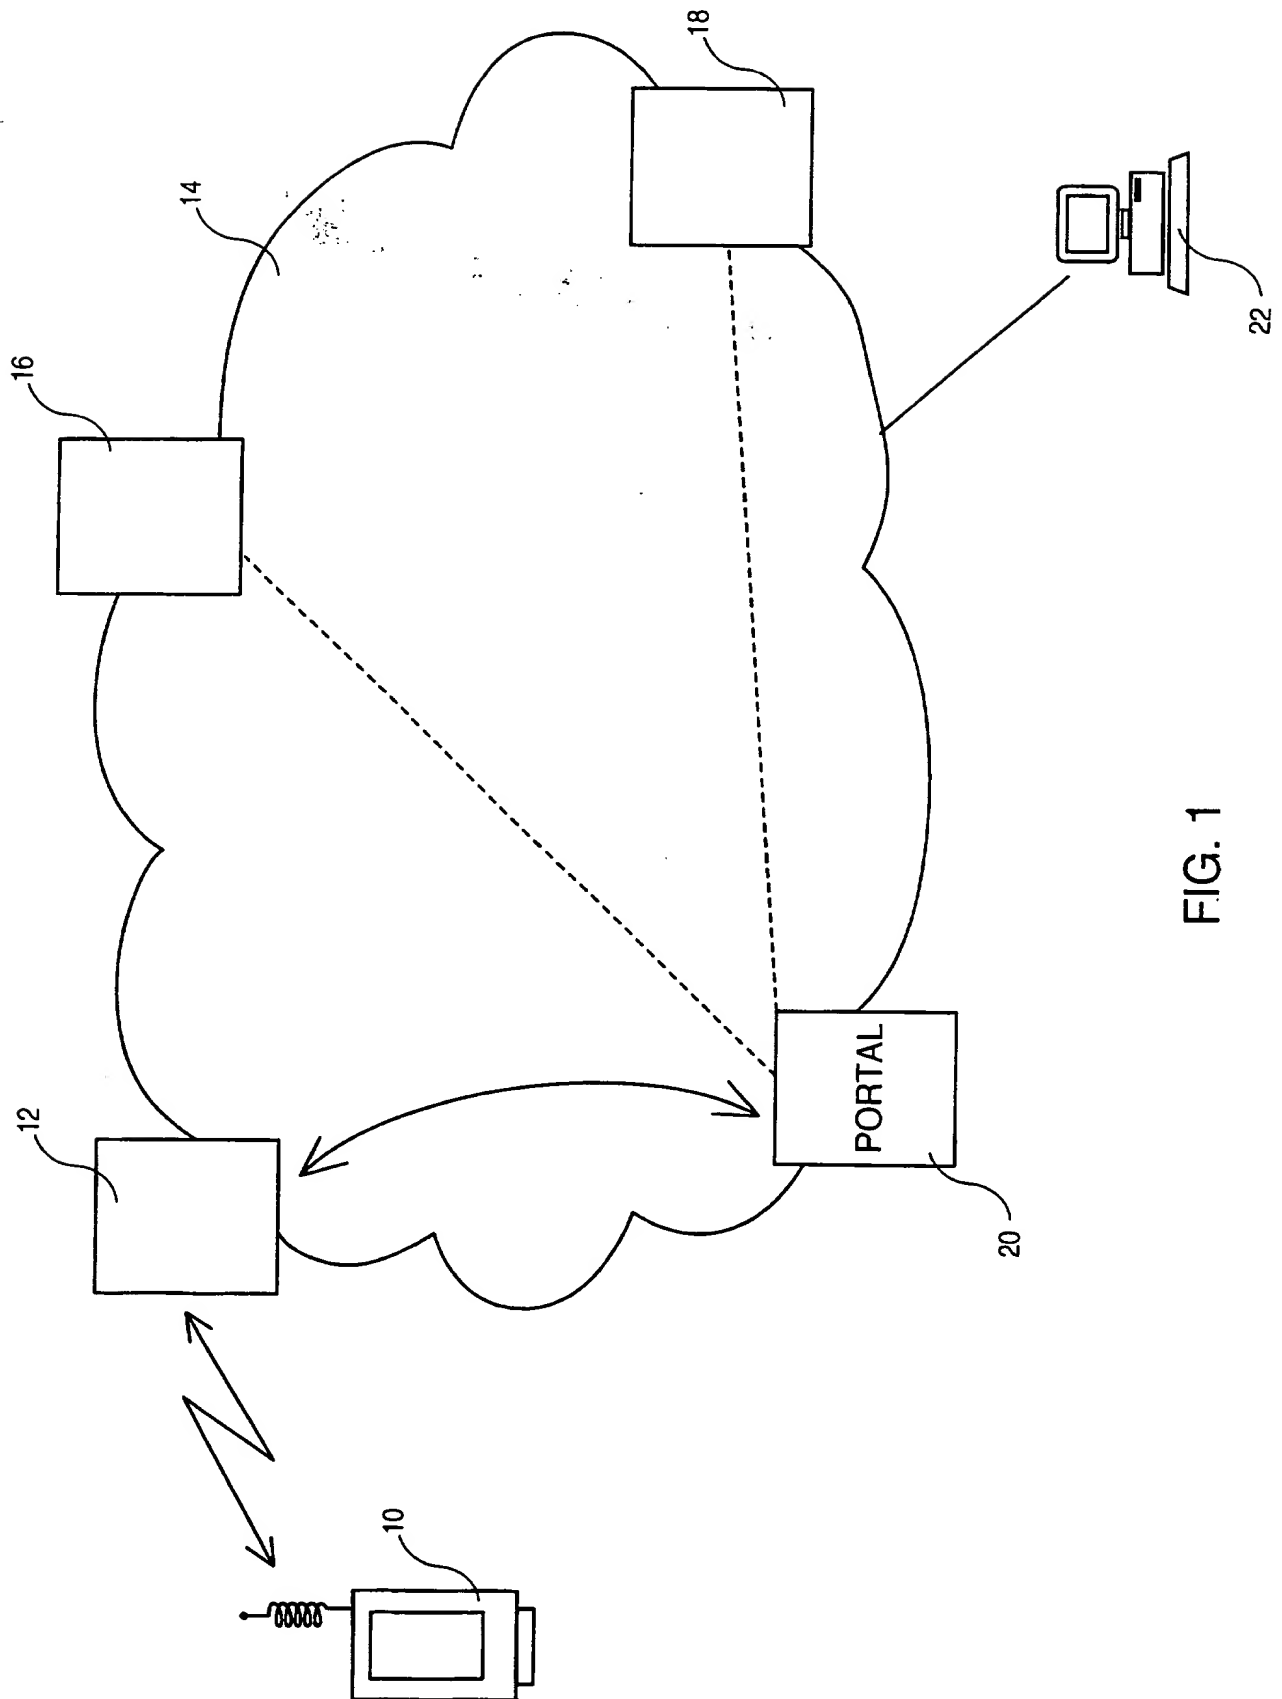


FIG. 1

FR 9 99 108
Benayoun et al
2/6

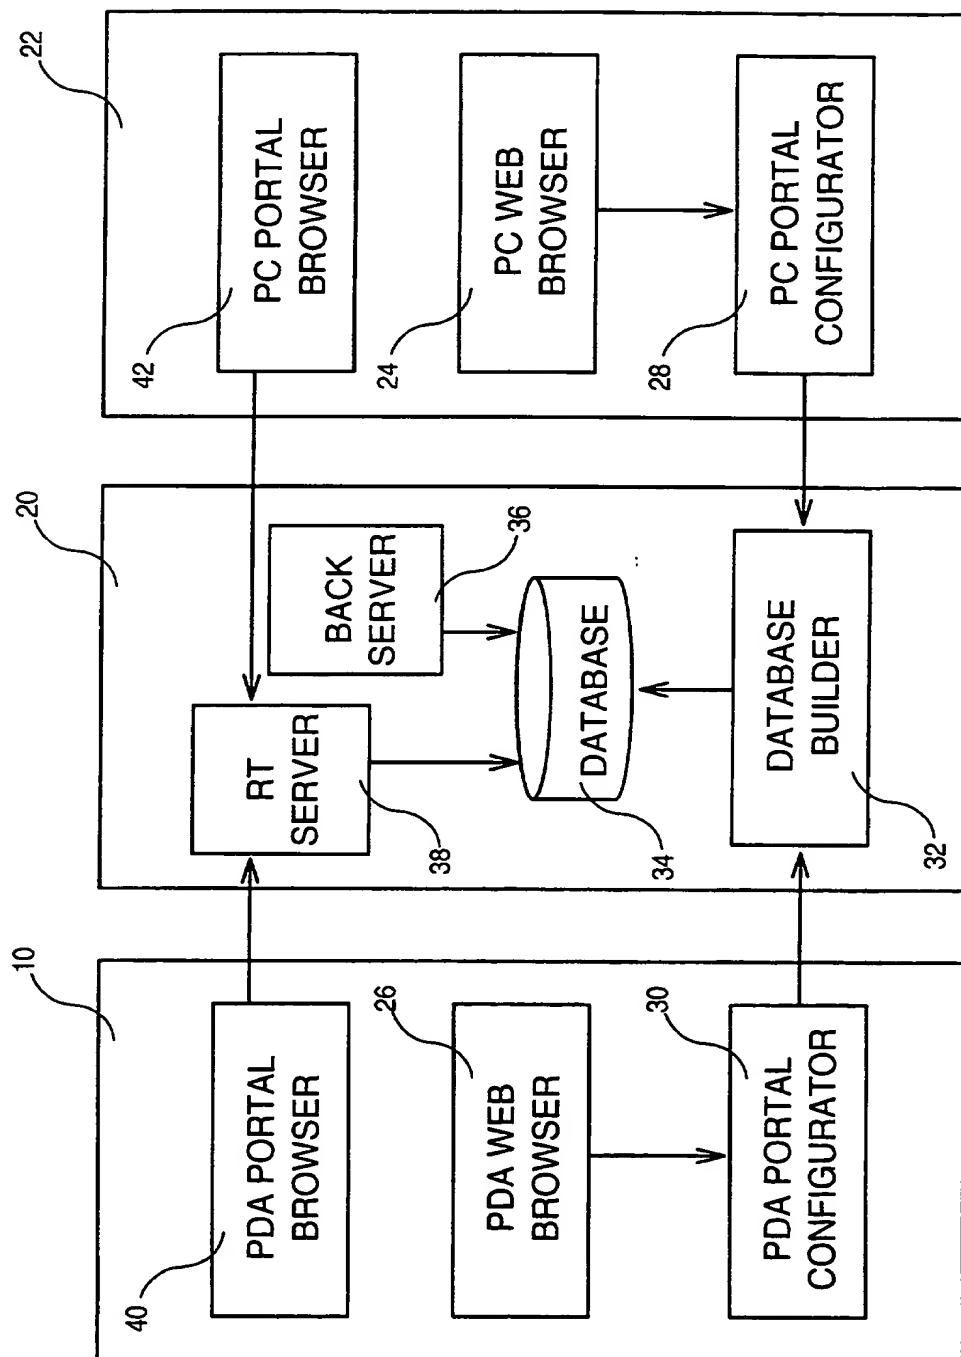


FIG. 2

FR 9 99 108
Benayoun et al
3/6

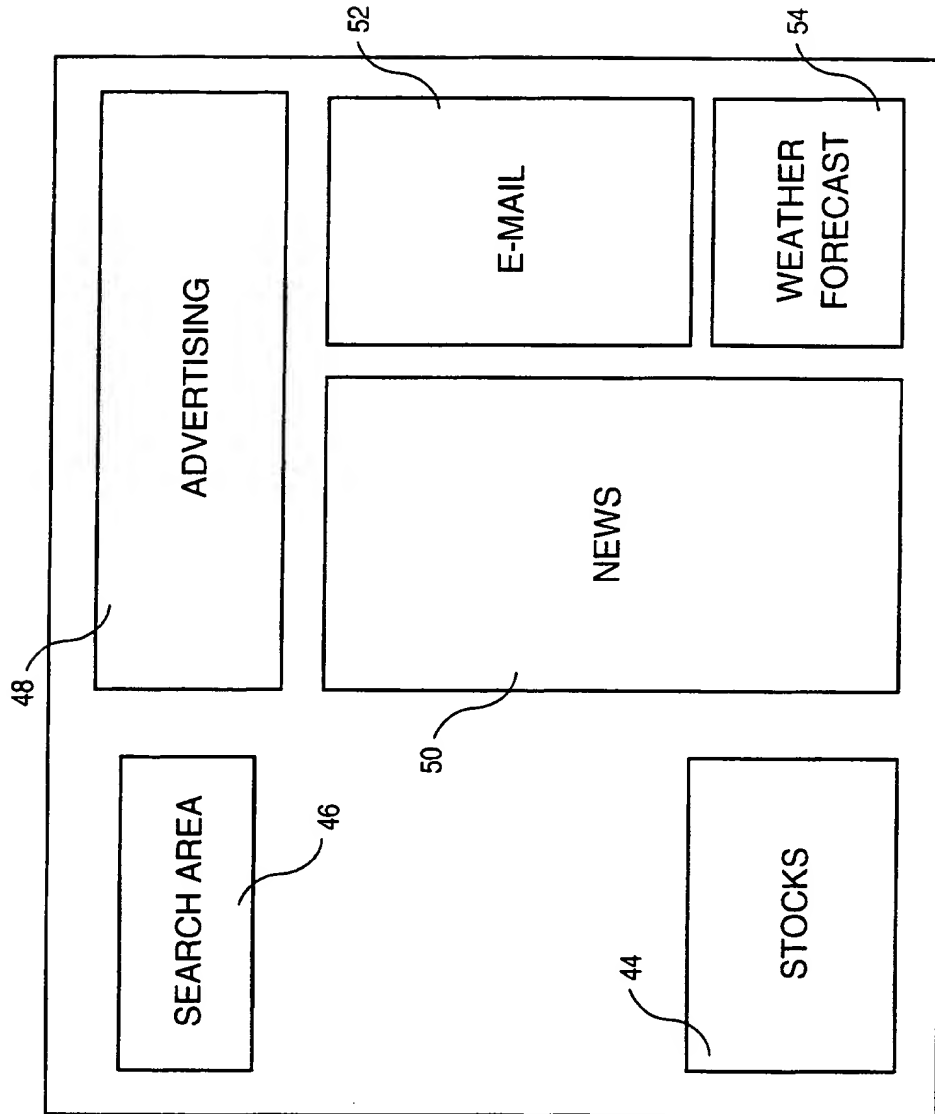


FIG. 3

FR 9 99 108
Benayoun et al
4/6

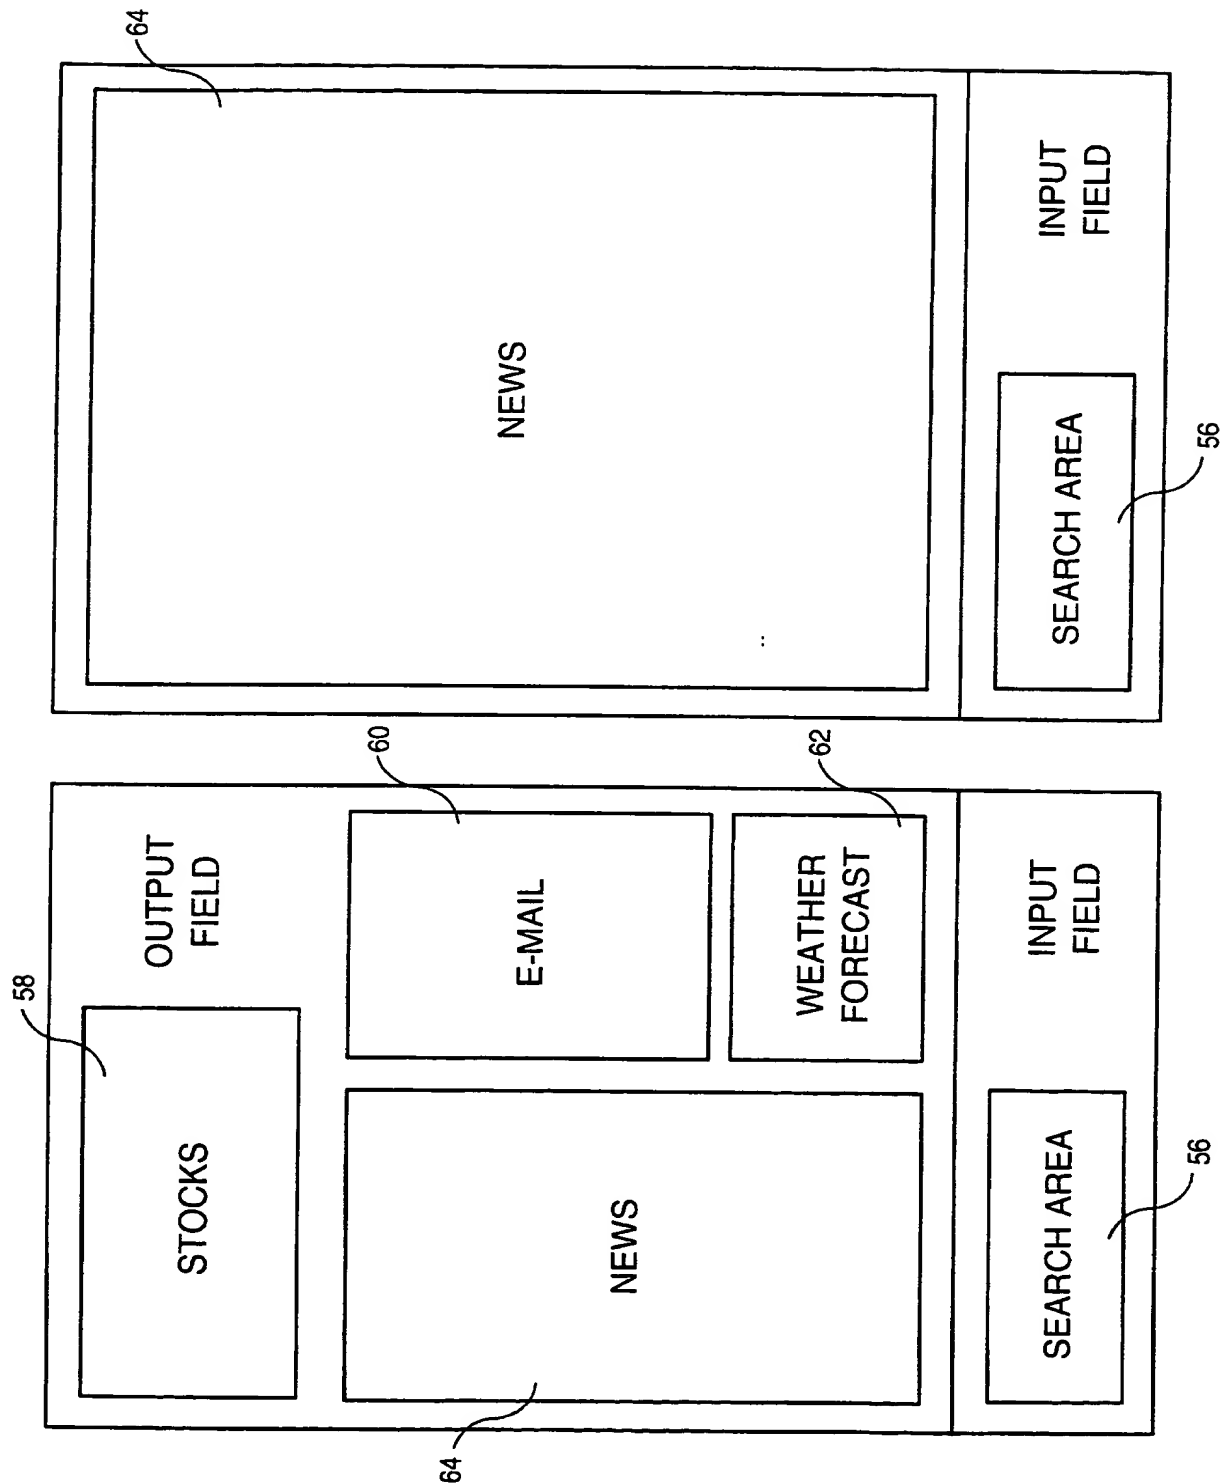


FIG. 4B

FIG. 4A

FR 9 99 108
Benayoun et al
5/6

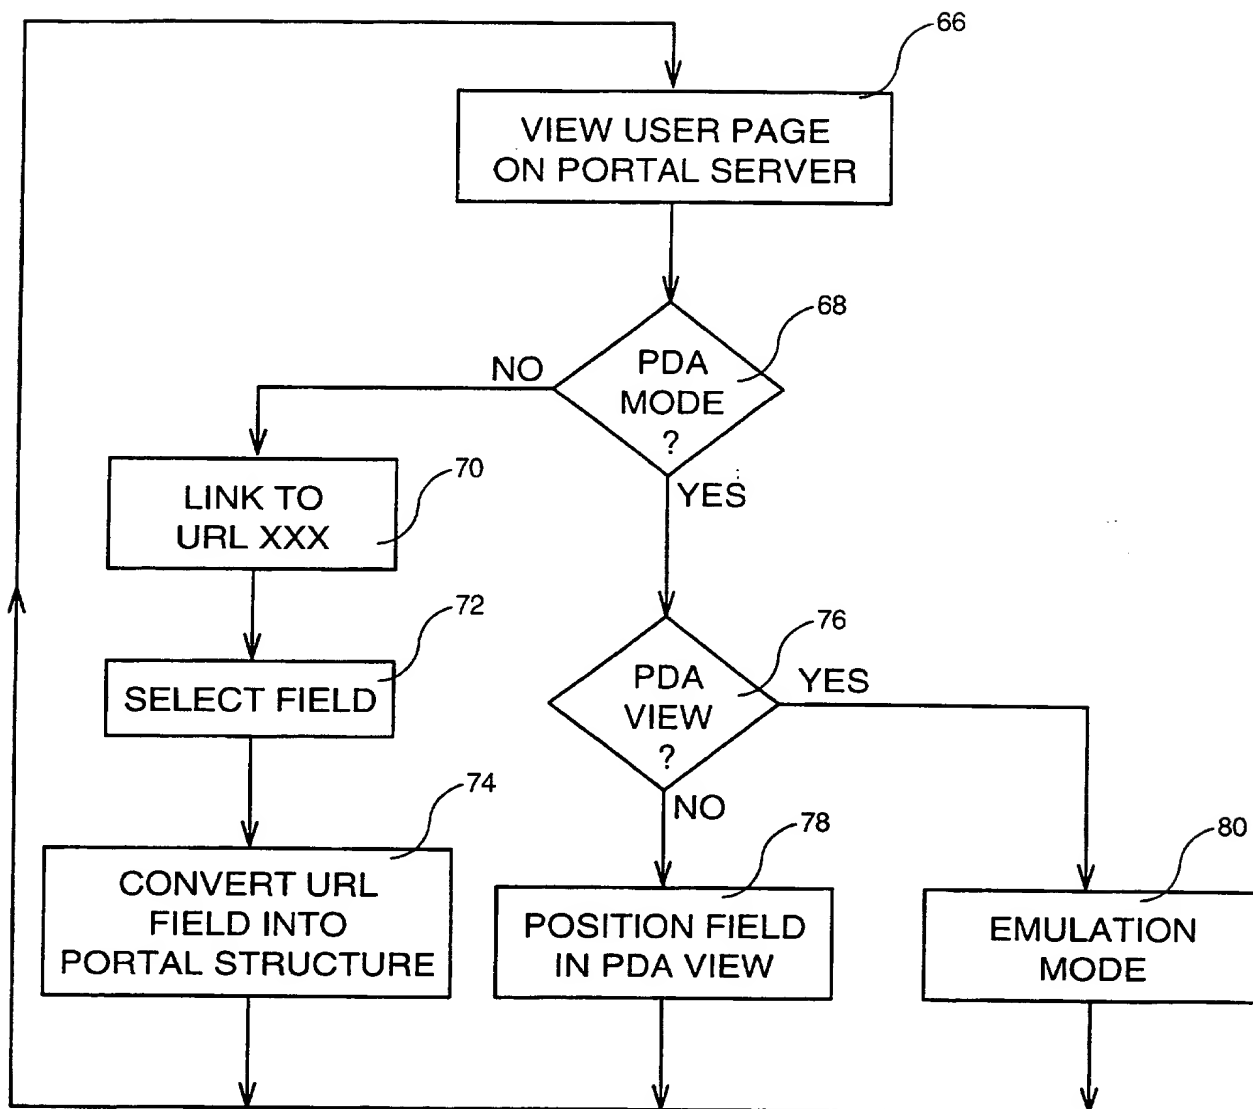


FIG. 5

FR 9 99 108
Benayoun et al
6/6

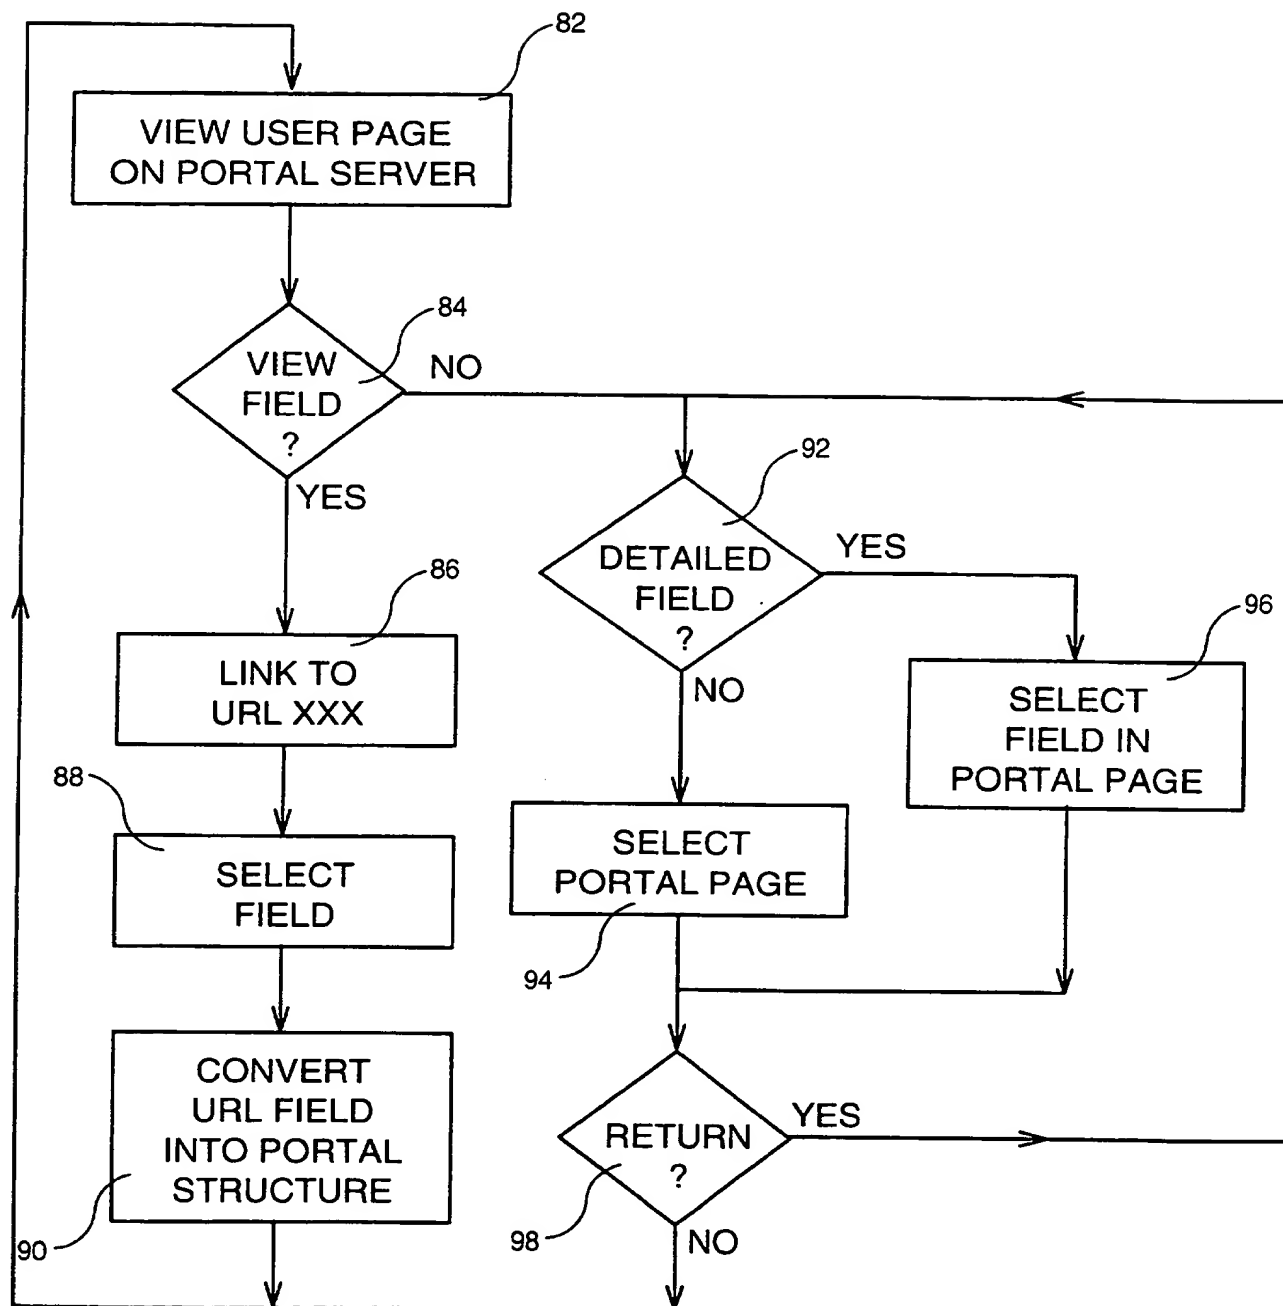


FIG. 6